






### FORZA IN SPINTA - OUTPUT FORCE - DRUCKKRAFT

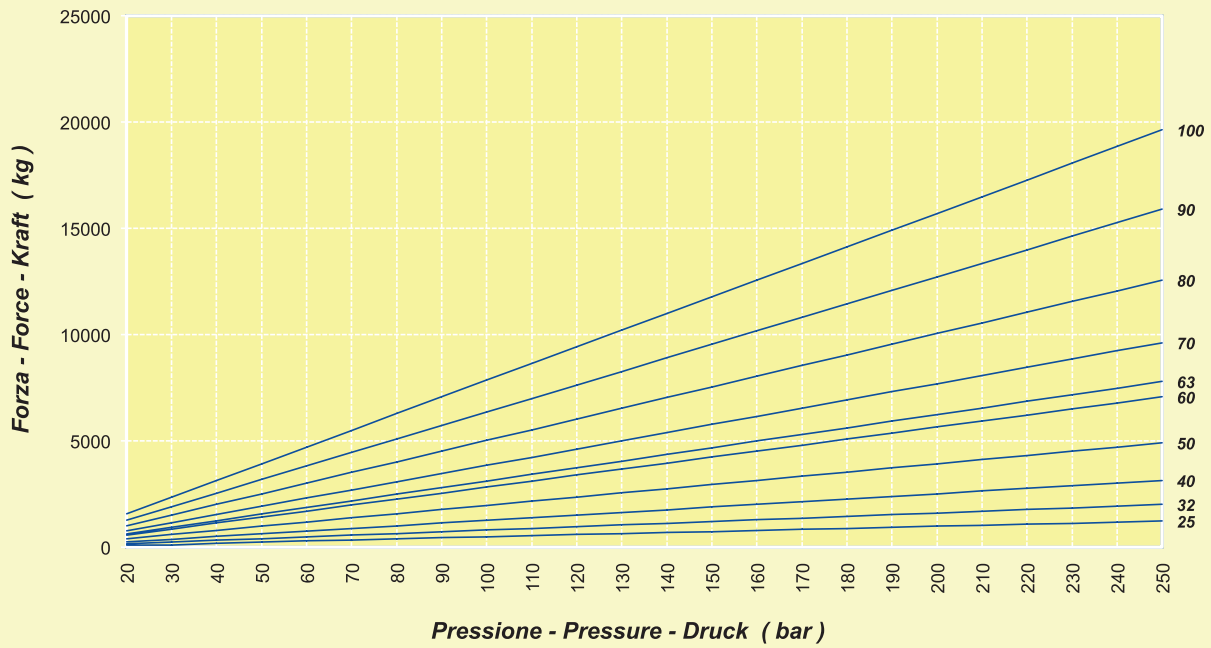

### FORZA IN TIRO - INPUT FORCE - ZUGKRAFT

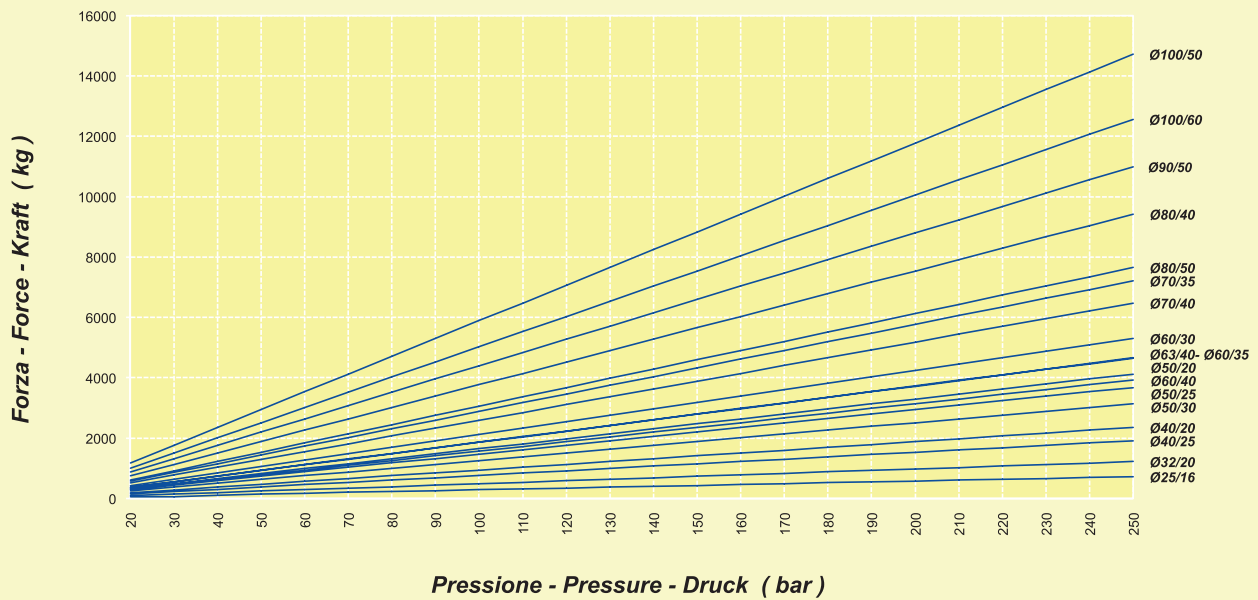


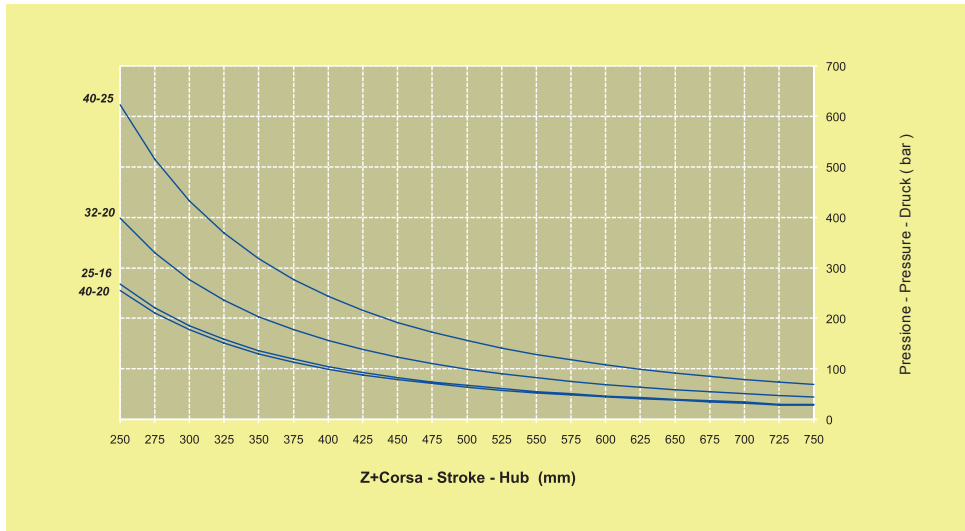

PRESSOFLESSIONE DEI CILINDRI  
STANDARD TIPO CS  
(Alesaggio 25-32-40 mm)

COMBINED COMPRESSIVE AND  
BENDING STRESS ON STANDARD  
CYLINDERS CS TYPE  
(Bore 25-32-40 mm)


KNICKLAST DER  
STANDARDZYLINDER TYP CS  
(Kolbendurchmesser 25-32-40 mm)

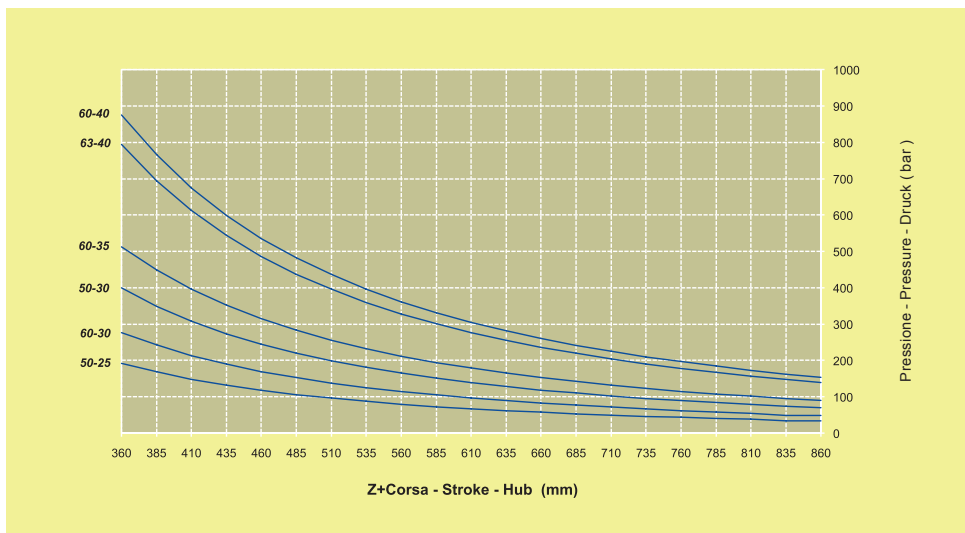

PRESSOFLESSIONE DEI CILINDRI  
STANDARD TIPO CS  
(Alesaggio 50-60-63 mm)

COMBINED COMPRESSIVE AND  
BENDING STRESS ON STANDARD  
CYLINDERS CS TYPE  
(Bore 50-60-63 mm)

KNICKLAST DER  
STANDARDZYLINDER TYP CS  
(Kolbendurchmesser 50-60-63 mm)

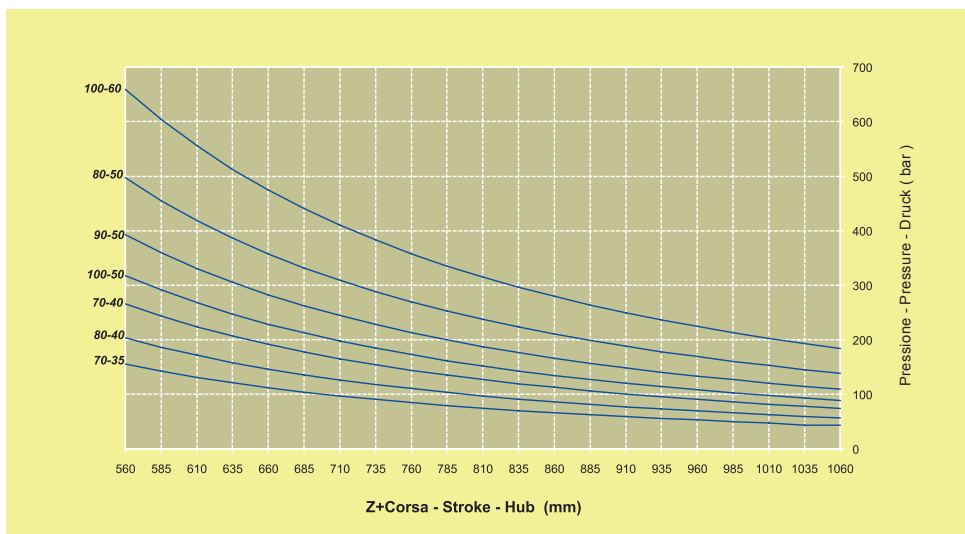

PRESSOFLESSIONE DEI CILINDRI  
STANDARD TIPO CS  
(Alesaggio 70-80-90-100 mm)

COMBINED COMPRESSIVE AND  
BENDING STRESS ON STANDARD  
CYLINDERS CS TYPE  
(Bore 70-80-90-100 mm)

KNICKLAST DER  
STANDARDZYLINDER TYP CS  
(Kolbendurchmesser 70-80-90-100 mm)